

# In-line Abandonment Plug

[www.ik-worldwide.com](http://www.ik-worldwide.com)



**Product:** IN-LINE ABANDONMENT PLUG

**Pipe Schedule:** VARIOUS

**Size Range:** 1/2" through 24" (Larger sizes on request)

IK's In-line Abandonment Plugs are recommended for DBB weld isolation applications.

In-line Abandonment Plugs are often requested when modifications are required on discontinued lines. The tool provides a double block & bleed barrier with a by-pass facility to ensure for safe operations.



The In-line abandonment plug allows for a safe isolation barrier during pre/post heating and welding when modifications are required on open hydrocarbon process lines, predominantly used in conjunction with end-capping operations.

## General Function and Application

- Available for horizontal and vertical applications
- High temperature seals/materials are used as to the nature of the operation or as requested
- Vice-jaws may be included into the design for higher pressures.
- Standard verification test pressure of up to 230 bar (depending on size) with higher test pressures available on request.
- Manually energised, mechanically
- Larger by-pass facility available on request
- Instructions and hydrostatic test certificates supplied

## AVAILABLE FOR HIRE

IK has an extensive range of Weld isolation Plugs available for hire

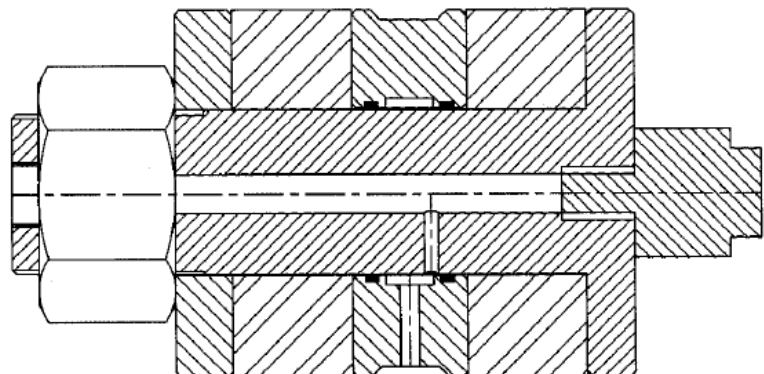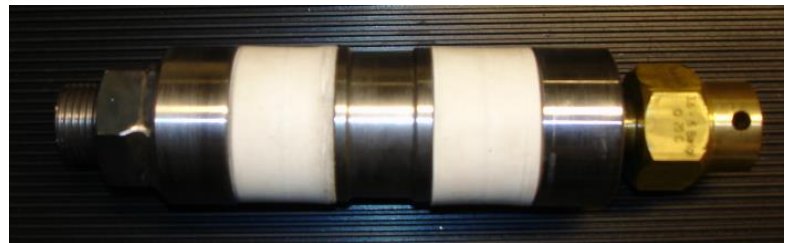

Data subject to change without notice, all rights reserved.



**IK-Norway**

post@ik-worldwide.com  
T: +47 51 44 32 00

**IK-UK**

sales@ik-worldwide.com  
T: +44 (0) 1325 307 508

**IK-Saudi**

contact-ik-saudi@ik-worldwide.com  
T: +966 13 85858362