Open End ROV Plug

www.ik-worldwide.com

Product: Open End Water Stop ROV Plug

Pipe Schedule: VARIOUS

Size Range: 2” through 36” (*Larger sizes on request)*

IK’s Open End Water Stop ROV Plugs are highly recommended for temporary plugging applications.

The plugs are based on the same concept as a batching / cleaning pig. Both the sealing and the mechanical fixation is based on two sealing discs.

The discs are slightly oversized and will facilitate a gentle squeeze onto the internal pipeline wall giving sealing and mechanical support.

The plugs are well fit for reuse and is deployed and recovered by the ROV in just a few minutes,

The sealing capacity cannot be guaranteed. The disc sealing will depend on the actual surface conditions of the inner pipe.

AVAILABLE FOR HIRE

IK has an extensive range of Open End Water Stop ROV operated Plugs for hire.

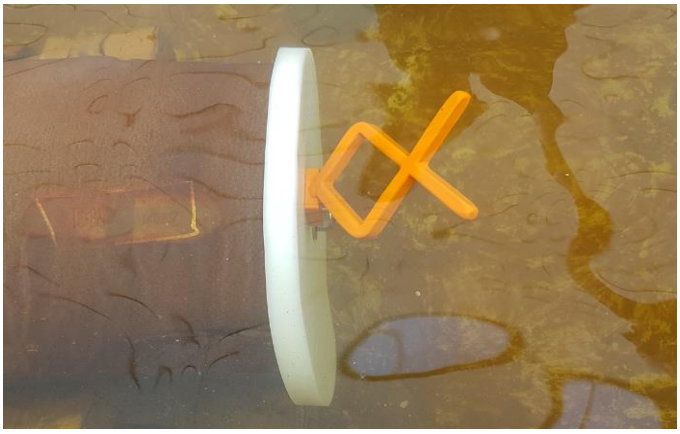

General Function and Application

- ROV installable (and recovery) with no special tooling (purely manip. operated), preferably "tight fit seal" stab-in with no tightening or torque operation (“Push-in & Pull-out”)
- No pressure differential holding capacity required
- Multiple plug and unplug operations to be possible
- Approx. 6 months’ design life
- Available for horizontal or vertical applications
- The plugs are manufactured in plastic / POM and is close to neutral in seawater as the density of the plastic material is just above 1
- Material: Plug: POM & Stainless Steel
  Seal: PUR / Neoprene
- Plug sealing: Sealing discs
- Plug physical support: Sealing discs

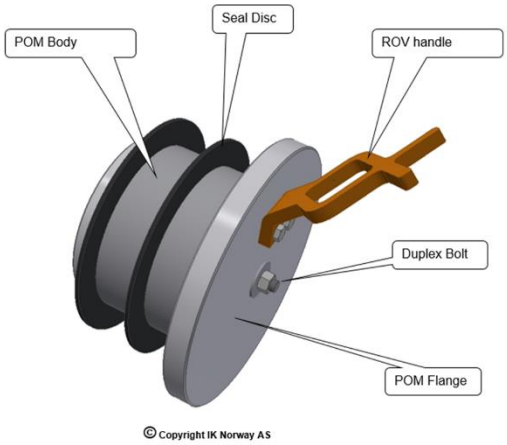

© Copyright IK Norway AS

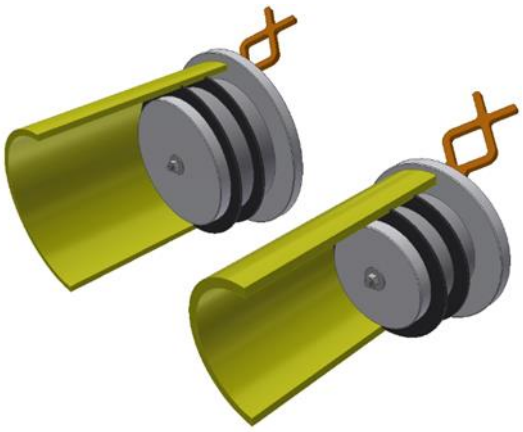

IK-Norway
post@ik-worldwide.com
T: +47 51 44 32 00

IK-UK
sales@ik-worldwide.com
T: +44 (0) 1325 307 508

IK-Saudi
contact-ik-saudi@ik-worldwide.com
T: +966 13 85858362