Twin Seal Multi Plug

www.ik-worldwide.com

Product: TWIN SEAL MULTI PLUG

Pipe Schedule: VARIOUS

ANSI Rating: 150 - 300 Standard

Size Range: 2” through 3” *(Larger & smaller sizes on request)*

It is often very difficult to create a safe environment for performing hot work on existing pipelines carrying hydro-carbon resources.

IK’s Twin Seal Multi Plug is a simple, reliable and economical tool for providing positive and proven isolation before hot work commences. It is also capable of hydrostatically testing any new welds afterwards – being a significant cost saver.

AVAILABLE FOR HIRE

IK have a range of Twin Seal Multi Plug available for hire

General Function and Application

- Double block & bleed function
- Central by-pass facility to vent gasses
- Can hold up to 30 bar between tyres - 76.5 bar for Schedule specific.
- Will hold a line pressure of 5 bar.g
- Can be used in a range of pipe schedules
- Provides a safe working environment
- Instructions and hydrostatic test certificates supplied

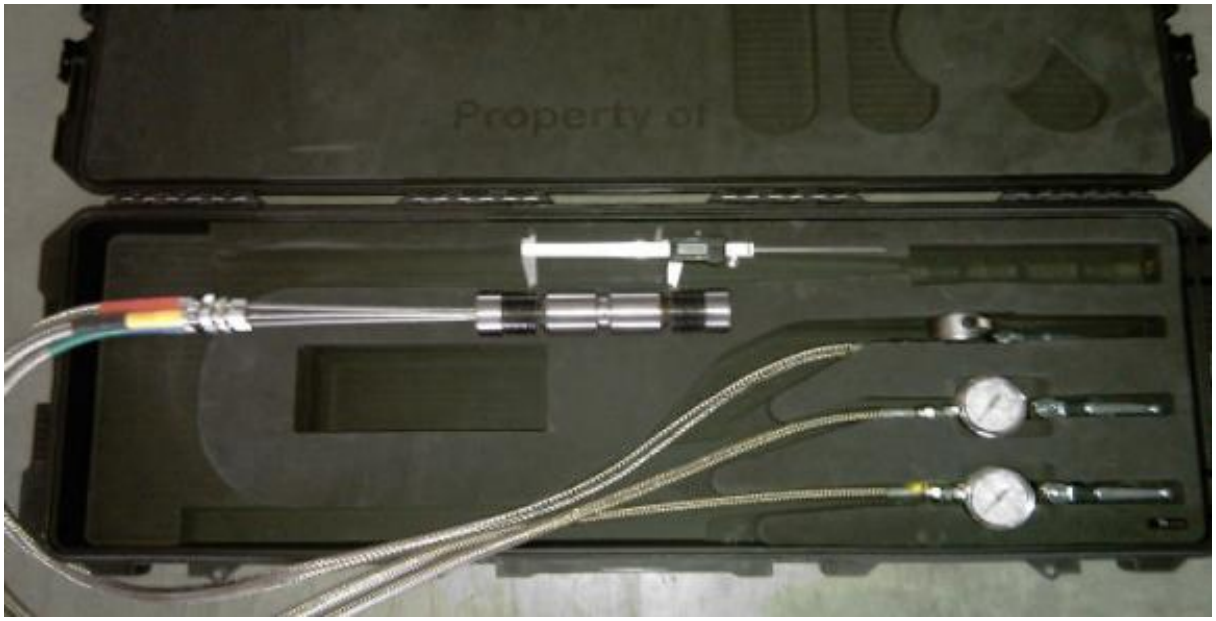

Data subject to change without notice, all rights reserved.

IK-Norway
post@ik-worldwide.com
T: +47 51 44 32 00

IK-UK
sales@ik-worldwide.com
T: +44 (0) 1325 307 508

IK-Saudi
contact-ik-saudi@ik-worldwide.com
T: +966 13 85858362