

Twin Tyre Multi Plug

www.ik-worldwide.com



Product: TWIN TYRE MULTI PLUG

Pipe Schedule: VARIOUS

ANSI Rating: 150 - 300 Standard

Size Range: 4" through 36" (Larger sizes on request)

It is often very difficult to create a safe environment for performing hot work on existing pipelines carrying hydro-carbon resources.

IK's **Twin Tyre Multi Plug** is a simple, reliable and economical tool for providing positive and proven isolation before hot work commences. It is also capable of hydrostatically testing any new welds afterwards – being a significant cost saver.

IK's Twin Tyre Multi Plug is presently used at many Oil & Gas Refineries worldwide for hot-work isolation.


For further information, please contact our Sales Team.

General Function and Application

- Double block & bleed function
- Central by-pass facility to vent gasses
- Can hold up to 30 bar between tyres - 76.5 bar for Schedule specific.
- Maximum differential pressure:
3"-24", line pressure 5 bar
26" and above, line pressure 3 bar
- Can be used in a range of pipe schedules
- Provides a safe working environment
- Instructions and hydrostatic test certificates supplied

AVAILABLE FOR HIRE

IK has an extensive range of Twin Tyre Multi Plugs available for hire

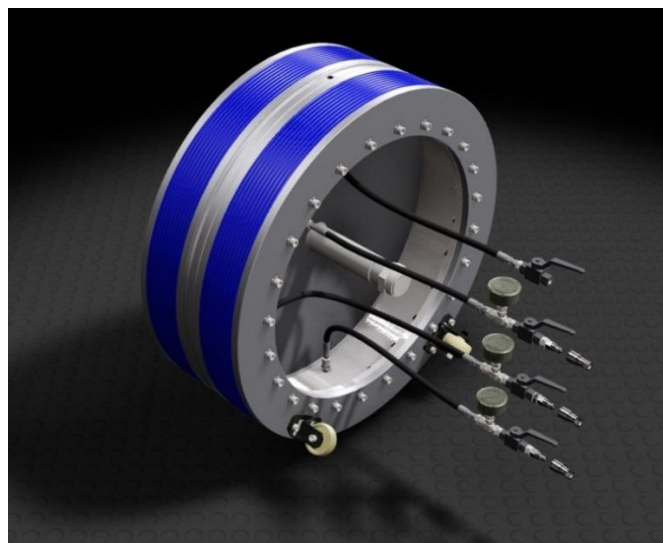

Data subject to change without notice, all rights reserved.



IK-Norway

post@ik-worldwide.com
T: +47 51 44 32 00

IK-UK

sales@ik-worldwide.com
T: +44 (0) 1325 307 508

IK-Saudi

contact-ik-saudi@ik-worldwide.com
T: +966 13 85858362