

## SAFETY VALVE TEST KIT

type SCSSV test kit

Resato's portable SCSSV test kit is a custom made solution for testing and actuation of safety valves and tubing reels on-site.

With the manual operated handpump, several objects can be pressurized and monitored on-site without any external power or air supply.

Stainless steel wetted parts, allow use of both water & mineral oil type fluids.


The test kit is a plug & play system for controlling and logging safety valves via the control-line.

All test kit components are connected via the Resato quick connector series.

The test kit is available in different pressure ranges and can be equipped with two digital gauge types. Both digital gauge types are battery-fed, Atex approved and have different logging functions.

## WORKING METHOD

- 1 Connect all items via quick connectors
- 2 Connect test hose to control line
- 3 Pressurize control line with handpump
- 4 Close isolate valve and disconnect handpump
- 5 Log pressure on digital gauge

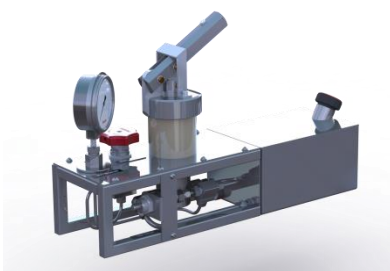

## ORDERING CODE

See ordering system in document

+31 (0) 50 501 6877  
hpsales@resato.com  
www.resato.com



## KEY FEATURES

Mounted in a heavy-duty watertight case  
Suitable for pressurizing oil, water or other fluids  
Designed for use in the field  
Manual controlled  
Battery-fed pressure logging  
Atex approved components

## KEY SPECIFICATIONS

Stainless steel wetted parts  
Pressures up to 1000 bar / 15,000 psi  
5 liter built-in tank  
Robust plastic pelican case  
1/4" & 3/8" Swage connection adapters

## SAFETY VALVE TEST KIT

type SCSSV test kit



### ITEM DESCRIPTION

- 1 Pelicase with foam inlay, wheels and handle-bar
- 2 Digital gauge, fitted with SK2-25 quick connector
- 3 High pressure handpump
  - ✓ Working pressure: 15.000psi
  - ✓ Built-in tank of 5 liters
  - ✓ Fitted with high pressure gauge
  - ✓ High pressure connection: SK2-25 quick connector
- 4 1 meter high pressure hose
- 5 5 meter high pressure hose
- 6 High pressure manifold
  - ✓ Fitted with SK2-25 quick connectors
  - ✓ Fitted with a Bleed valve with drain pipe
  - ✓ Fitted with an isolate valve
  - ✓ Mounting bracket
- 7 1/4" Swage adapter to SK2-25 quick connector
- 8 3/8" Swage adapter to SK2-25 quick connector

## ALTERNATIVE NVISION RECORDER

Digital recorder with logging functionality

Pressure transmitter

Temperature probe

Battery-fed

Atex approved

Fitted with SK2-25 quick connector



## ORDERING TABLE

Item	Partnumber
Safety valve test kit (XP2I)	1066183
High pressure handpump	1066207
Manifold skid (excluding digital gauge)	1066177
XP2I digital gauge +quick connector	1066180
NVision logging recorder +quick connector	1064752
2 meter hose +quick connector	1066196
5 meter hose +quick connector	1066198
1/4" Swagelok adapter +quick connector	1066252
3/8" Swagelok adapter +quick connector	1066254

### Resato international BV

📍 Duitslandlaan 1  
9403 DL Assen - Holland

✉ P.O. Box 950  
9400 AZ Assen - Holland

✉ hpsales@resato.com  
🌐 www.resato.com/highpressure

☎ +31 (0) 50 501 6877  
☎ +31 (0) 50 501 2402

V1.0 - Please note that general data and specifications given in this brochure are subject to change without notice.  
Feel free to contact our sales department if you need more definite information.